



70013 Waikiki



Natralis™
Homogeneous Sheet



70001 White Rim, 70017 Utah

70001 White Rim

Proven Floor for Healthy Environments














Natralis™ is more than just a beautiful flooring design. It's carefully crafted to promote wellness and inspire creativity in healthcare and education settings. The natural elements within the design create a calming and restorative environment, while the dynamic speckles stimulate the imagination. And with its durable and easy-to-clean construction, Natralis can withstand the demands of high-traffic environments.



Building Better

We share your commitment to transparency and building a better environment together.

- Third-party certified Environmental Product Declaration (EPD) available
- Low VOC emissions and FloorScore® certified
- Free of Ortho-phthalates and heavy metals – meets Well Building Standard® Toxic Material Reduction Credit requirements

	
70021 Volcano Weld Rod #WH245	70009 Petrified Gray Weld Rod #WH235
	
70003 Hot Springs Weld Rod #WN112	70002 Arctic Weld Rod #WH232
	
70004 Spray Foam Weld Rod #WN101	70013 Waikiki Weld Rod #WH238
	
70012 Kenai Lagoon Weld Rod #WH237	70014 Neptune Jade Weld Rod #WH239
	
70005 Glacier Bay Weld Rod #WN101	70015 Nugget Falls Weld Rod #WH240
	
70020 Radiant Weld Rod #WH244	70022 Vanta Weld Rod #WN116
	
70016 Pacific Weld Rod #WH241	




70001 White Rim, 70010 Sand Dune



70004 Spray Foam, 70008 River Rock, 70012 Kenai Lagoon

Durable Performance

Natralis™ homogeneous vinyl sheet commercial flooring is highly durable, easy to clean, low maintenance and meets high performance criteria. Natralis has a low-maintenance polyurethane coating that eliminates the need to polish.

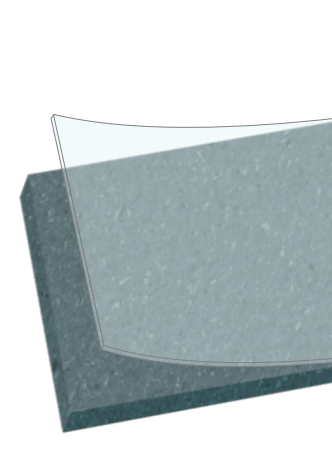

1. Commercial Polyurethane Coating
2. True Through-Pattern Wear Layer

10 Year Commercial Limited Warranty

Supported by a 10 Year Commercial Warranty. Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products. Visit armstrongflooring.com for more information.

Product Information

Construction - Homogeneous Sheet

International Specifications - ASTM F1913

Overall Thickness - 0.080 in. (2.0 mm)

Wear Layer Thickness - 0.080 in. (2.0 mm)

Size - Up to 52.5 ft (16 m) 6 ft. (1.83 m)

Factory Finish - Commercial Polyurethane Coating

Installation - Full Spread Adhesive: S-995

Seams - Heat Weld or S-761 Seam Adhesive

Maintenance Options - No Polish - No Buff, Polish Optional

Shade may vary from sample.

Armstrong Flooring™

Walk On. Walk Strong.™



Visit [ArmstrongFlooring.com](https://www.armstrongflooring.com)

for complete Product, Technical,
Adhesives, Installation and
Maintenance recommendations.

Print#: AF-1054-523

Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | All other trademarks are owned by AHF Licensing LLC. | © 2023 AHF Licensing LLC.
FloorScore® is a registered trademark of the Resilient Floor Covering Institute. | Well Building Standard® is a registered trademark of the International Well Building Institute.™