

Industry Leading Design, Durability, and Performance.

Armstrong Flooring is excelling in design, innovation, and performance with its new product, Bridgeway Flex. This exciting new product was developed to meet the demands and rigor of the RV production plants and the needs of the designers and installers.



Superior Durability

Comprehensive testing ensures performance against rips, tears, gouges and drops.



Upscale Design

High-end, on-trend designs that complement all decors and styles.



Superior Dimensional Stability

Industry leading resistance to extreme temperature changes like cold cracking and heat swelling.



Outstanding Resistance

Waterproof surface that is easy to clean.



Certified

Meets or exceeds low emission standards for better indoor air quality by FloorScore.



American Made

Made with pride in Stillwater, Oklahoma with global and domestic content.

Bridgeway™ Flex Vinyl Sheet Flooring



X9700
Ceruse Oak
Cool Taupe



X9702
Ceruse Oak
Morris Run



X9703
Ceruse Oak
Wolf Run



X9704
Ceruse Oak
Worn Slate




X9705
Timekeeper's Call
Shore Brown




X9706
Timekeeper's Call
Saltwash Mist



X9707
Timekeeper's Call
Shore Taupe



X9710
Ridge Plank
Abbott Beige



X9711
Ridge Plank
Iron



X9712
Ridge Plank
Smoke



X9715
Summit
Meadow Beige



X9716
Summit
Ravine Beige



X9720
Parchment Living
Okome Grey



X9721
Parchment Living
Autumn



X9722
Parchment Living
Steel Wool



X9725
Hermosa
Sweet Honey



X9726
Hermosa
Light




X9729
Hermosa
Bay



X9730
Weekender
Milk Chocolate



X9731
Weekender
Storm



X9732
Weekender
Sand



X9735
Hayden
Cascade Grey




X9736
Hayden
Brown Fog



X9740
Palatine Hill
Mountain Dust


Bridgeway™ Flex Vinyl Sheet Flooring




X9745
Distressed Hickory
Saddle



X9746
Distressed Hickory
Natural



X9747
Distressed Hickory
Rustic Mocha



X9748
Distressed Hickory
Walnut



X9750
Hardland Oak
Alex Grey



X9751
Hardland Oak
Driftwalk



X9752
Hardland Oak
Emeline Grey




X9753
Hardland Oak
Olivia Brown



X9755
Hilborn Run
Stone Grey



X9760
Venetian Marble
Alabaster




X9761
Venetian Marble
Classic Onyx




G2575
Hayden
Ecrú



X9765
Timber Frame
Down Home Brown



X9770
Tosca
Classy



X9771
Tosca
Neutral

Bridgeway™ Flex Vinyl Sheet Flooring

Industry Leading Performance and a tougher structure.

Featuring our new, unique StrongFlex™ backing and traditional PVC coating, Bridgeway Flex offers enhanced durability at a cost-effective price point.

Bridgeway Flex outpaces the competition under key flooring performance tests

Test	New Bridgeway Flex*	Bridgeway Felt	Beauflor**	Congoleum**	Shaw**
Rip, Tear, Gouge (Appliance Foot Drag) – Dragging heavy equipment or appliances over the floor during construction	3	2	1	2	2
Dimensional Stability – Resistance to buckles and bubbles	3	3	0	2	1
Tool Drop – Dropping a tool from 36 in. height.	2	2	1	2	1
Tear – As experienced when pulling the material taught in install on the floor deck of the unit	2	1	2	2	1
Static Load – Ability to recover from a heavy load like furniture - ASTM: F970	3	3	2	1	3
Indent – Dents from chairs and normal household use - ASTM: F1914	2	1	1	2	3
Total Score	15	12	7	11	11

3 = Best Performance | 2 = Better Performance | 1 = Good Performance | 0 = Poor Performance

*Bridgeway Flex shows improvement over Bridgeway Felt.

**Beauflor, Congoleum, and Shaw are not affiliated with and do not endorse any Armstrong Flooring product.

Product Specifications

Gauge / Wear - 55 mils / 12 mils

Wear Layer - Vinyl No-Wax

Structure - StrongFlex™

Warranty - 7-Year Limited Residential & 7-Year Cold Crack


Roll Width - 8 ft. & 9 ft.

Seam Sealer - S-500 or S-761

Seam Alignment - Do Not Reverse

Installation - Staple

Adhesive - S-295 or S-299

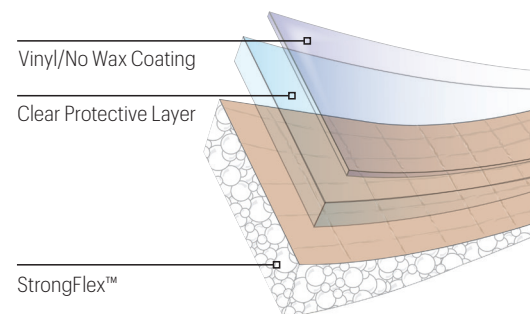

Bridgeway™ Flex Vinyl Sheet Flooring

Armstrong Flooring Adhesive Options

Glass/Vinyl-Backed Sheet	Armstrong Flooring Adhesive		Benefits	Open Time	Working Time	Spread Rate (sq. ft./gallon)	RH Limit
	Premium	S-295	<ul style="list-style-type: none"> High strength adhesive with strong initial grab 	Dry-to-touch	2 hours	220-260 sq. ft./gallon	95%
	Premium	S-299	<ul style="list-style-type: none"> High strength adhesive Offers extended working time and fast dry time Ease of application 	Dry-to-touch	4 Hours	220-260 sq. ft./gallon	Up to 95% for sheet and up to 99% for LVT
	Seam	S-761 Seam Adhesive	<ul style="list-style-type: none"> Quick and easy seaming method Can install in 15 minutes No special tools or added charges 	None	Meets or exceeds	144 lin. ft. per 8 oz. bottle	80%
	Seam	S-500 Coating Kit	<ul style="list-style-type: none"> Quick and easy coating method No special tools needed 	None	Meets or exceeds	50-60 lin. ft. per kit	N/A

Fire Data Test - Meets the burn rate requirements for FMVSS302 Flammability of Interior.

Reference Specifications - ASTM F 1303, Type I, Grade 3, Class C Backing. Complies with the requirements for floor coverings set forth in the HUD Minimum Property Standards for Housing (MPS 4910.1) for light traffic areas as referenced by ASTM F1303 Type I, Grade 3, Class C Backing.

See Armstrong Guaranteed Installation Systems book, F-5061, for more details.



Visit floorexpert.com

for complete Product, Technical, Adhesives, Installation & Maintenance recommendations

F-10545-1121

Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | All other trademarks are owned by AFI Licensing LLC. | ©2021 AFI Licensing LLC.
NOTE: Due to printing limitations, colors pictured cannot be guaranteed to match actual flooring material.



Made In The USA

Armstrong Vinyl Flooring is manufactured with global and domestic content.



FloorScore® is a trademark of the Resilient Floor Covering Institute.