

NexPro™ Rigid Core Flooring



Noise Control

Reduced sound transmission from attached underlayment.



Indent Resistant

Solid polymer composite core for superior dent resistance.



100% Waterproof Planks

NexPro rigid core flooring is perfect for high moisture areas such as kitchens, bathrooms and laundry rooms.



Rapid Floor Program

Our entire NexPro Collection ships within 2 business days.

Product Specifications


Core	SPC
Nominal Size	7" x 48"
Overall Thickness	4 mm - 3.5 mm rigid polymer core & 0.5 mm underlayment
Wear Layer	8 mil - Urethane
Edge Detail	Square
Coverage	28.52 sq. ft. per ctn
Installation	Angle Locking Below / On / Above Ground Level
Warranty	15-Year Limited Residential / 5-Year Limited Commercial
Flame Spread ASTM E 648	0.45 W/cm ² or more Class I
Smoke Evolution ASTM E 662	450 or less
Acoustical Performance:	IIC 52, STC 50, IIC 21
Trade Up	\$

8 mil wear layer with urethane coating

Printed film design layer

Solid polymer composite (SPC) core

Polyethylene Acoustic Pad

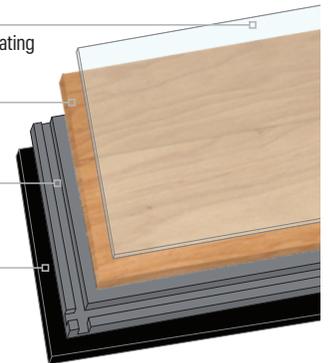

A6022
Northern Lodge Oak
Sandstone Walkway



A6023
Northern Lodge Oak
Favorite Trail Brown



A6024
Treasured Villa Oak
Weathered Slate



A6028
Treasured Villa Oak
Mocha Cappuccino



A6029
Treasured Villa Oak
Worn Saddle




A6031
Charmed Bungalow Oak
Woven Hemp



NexPro™ Rigid Core Flooring



Coordinated Trim & Accessories



Design/Color	SKU	Multi-Purpose Trim	Overlap Stairnose	End Cap Trim
Northern Lodge Oak Sandstone Walkway	A6022	TR032TRM	TR032STR	TR032ECP
Northern Lodge Oak Favorite Trail Brown	A6023	TR033TRM	TR033STR	TR033ECP
Treasured Villa Oak Weathered Slate	A6024	TR034TRM	TR034STR	TR034ECP
Treasured Villa Oak Mocha Cappuccino	A6028	TR035TRM	TR035STR	TR035ECP
Treasured Villa Oak Worn Saddle	A6029	TR036TRM	TR036STR	TR036ECP
Charmed Bungalow Oak Woven Hemp	A6031	TR037TRM	TR037STR	TR037ECP



Visit [ArmstrongFlooring.com/Pro](https://www.armstrongflooring.com/pro)
for complete Product, Technical, Adhesives, Installation & Maintenance recommendations
F-10544-321



FloorScore® is a trademark of the Resilient Floor Covering Institute.

Armstrong and the Armstrong logo are under license from AFI Licensing LLC.
All other trademarks are owned by AFI Licensing LLC. | ©2021 AFI Licensing LLC.

NOTE: Due to printing limitations, colors pictured cannot be guaranteed to match actual flooring material.