


Energy in Motion

Ever moving and changing, energy can transform a physical space. Catalyze an exchange of positive energy between tangible and intangible with purposeful movement of color.

Exchange™ was created to invigorate and inspire with soft pastels and rich, saturated tones that complement a visual texture designed to add depth and interest.

Recommended Installation Methods





Ashlar






Herringbone

Stagger



System Gradient features a subtle ombre effect across a 6 in. x 36 in. plank in a soft color palette, mimicking the flow of light through space and creating a sense of clean comfort.

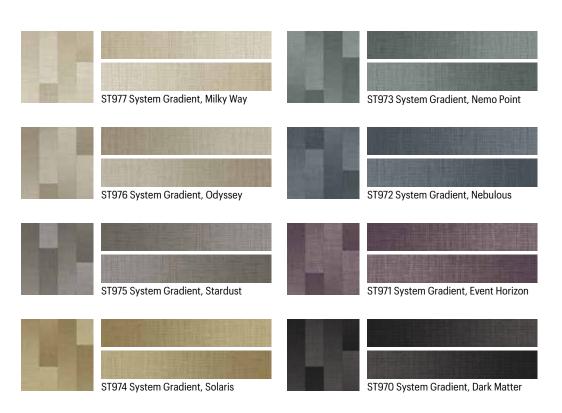



Building Better

We share your commitment to transparency and building a better environment together.

- Low VOC emissions and FloorScore® certified
- Free of ortho-phthalates and heavy metals
- Recyclable through the On&On® Recycling Program
- Health Product Declaration (HPD) and third-party certified Environmental Product Declaration (EPD) available
- Made in the USA with global and domestic content



Available in a 6 in. x 36 in. plank, **Static** offers consistent saturation of color in a variety of neutrals and bright pops of color that can stand alone or be used as a collaborative accent.

ST901 Static, Amped Yellow ST900 Static, White Noise ST902 Static, Capacitor Orange ST960 Static, Bakelite ST903 Static, Relay Red ST961 Static, Stereo Brown ST904 Static, Blue Screen ST964 Static, Nimbus ST912 Static, Greenlight ST965 Static, Broadcast Blue ST905 Static, Motherboard ST963 Static, Scattered Skies ST906 Static, Mainframe ST910 Static, Cathode Gray ST913 Static, Selenium ST907 Static, Thunderstorm





Breakthrough Innovation

Diamond 10[®] Technology is a patented innovation that uses cultured diamonds to provide the ultimate in scratch, stain, and scuff resistance.

With Diamond 10 Technology, you'll never compromise the look you want for the durability you need. Made to stand up to the wear and tear of commercial settings, this low-maintenance solution keeps floors looking newer, longer.







1. Diamond 10® Technology

Patented innovation that uses cultured diamonds to provide category-leading scratch, stain, and scuff resistance from edge-to-edge

2. Rigid Wear Layer

The combination of Diamond 10° Technology and the unique rigid wear layer results in enhanced durability and abrasion resistance

- 3. Realistic Printed Visual
- 4. Foundation Layer

5. Eased Edge

Designed to blend seamlessly into the next plank for ease of maintenance and cleanability

20 Year Commercial Limited Warranty

Supported by a 20 Year
Commercial Limited Warranty.
Add 10 years of overall
warranty coverage by using
Strong System™ subfloor
preparation products. Visit
ArmstrongFlooring.com for
more information.



Product Information

Construction - Solid Vinyl Tile (Luxury Vinyl Tile / LVT) **International Specifications** - ASTM F1700, Class III,

Type B, embossed surface

Overall Thickness - 2.5 mm / 0.100 in. Wear Layer Thickness - 20 mil / 0.020 in.

Size - 6 in. x 36 in.

Factory Finish - Diamond 10® Technology

Installation - Adhesives: S-1000, S-995, S-319 Roll Strong[™] Maintenance Options - No Polish - No Buff, Polish Optional

Color and visual variation is inherent in all resilient products. Prior to installation, we recommend reviewing multiple tiles.

ArmstrongFlooring[®]

Walk On. Walk Strong.





Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.



Print#: FP7440F10491-1121