



5A056 Spice White, 5A076 Sterling Gray



Accolade Plus™
Homogeneous Sheet



5A006 Sovereign Gold, 5A056 Spice White, 5A057 Cappuccino

Your Everyday Floor


Accolade Plus™ is a homogeneous sheet vinyl floor with a contemporary color palette and bold tone-on-tone visual, which combines excellent durability and maintenance characteristics. Styled to blend light and shade in a multi-chip visual, Accolade Plus is suitable for the daily demands of commercial spaces including healthcare, education, light industrial and hospitality.



5A074 Sand Bond




5A056 Spice White



5A078 Byron Blue



5A003 Parkland Pine



5A073 Capricorn Beige




5A076 Sterling Grey



5A098 Maslin Blue




5A002 Mountain Moss



5A091 Mallee Wheat



5A021 Cloudy




5A049 Bell




5A006 Sovereign Gold



5A057 Cappuccino



5A072 Darling Grey




5A090 Misty Blue



5A007 Tanami



5A092 Mulch



5A020 Collins Grey




5A095 Blue Lake




5A099 Flamed



5A061 Ironbark



5A062 Black Opal



5A005 Turquoise Bay



5A097 Riverina Plum

Building Better

We share your commitment to transparency and building a better environment together.

- Third-party certified Environmental Product Declaration (EPD) available
- Low VOC & FloorScore® certified








Durable Performance

Accolade Plus features a durable homogeneous construction for excellent indentation and gouge resistance. The embossed surface texture and highly accented jaspé (multi-color chip) visual help hide dirt and wear patterns created in high-traffic conditions. Accolade Plus has a low-maintenance polyurethane coating that eliminates the need to polish.



5A056 Spice White, 5A072 Darling Grey

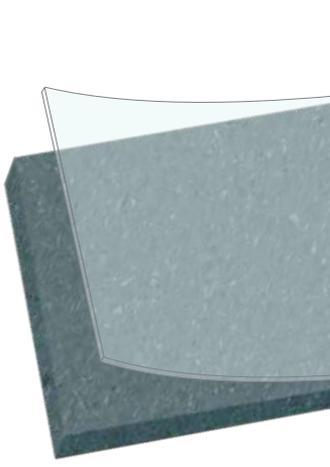

1. Commercial Polyurethane Coating
2. Through Pattern Wear Layer

5 Year Commercial Limited Warranty

Supported by a 5 Year Commercial Warranty. Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products. Visit armstrongflooring.com for more information.

Product Information

Construction - Homogeneous Sheet

International Specifications - ASTM F1913

Overall Thickness - 0.080 in. (2.0 mm)

Wear Layer Thickness - 0.080 in. (2.0 mm)

Size - Up to 82.5 ft (25 m) 6 ft. (1.83 m)

Factory Finish - Polyurethane Commercial Finish

Installation - Full Spread Adhesive: S-995, Flash Cove Adhesive: S-580,

Seams: Heat Weld with PVC-Free Weld Rods or S-761 Seam Adhesive

Maintenance Options - Polish, No Polish - Spray Buff, No Polish - No Buff

Shade may vary from sample.

ArmstrongFlooring™

Walk On. Walk Strong.™

 Diamond 10
Technology™



Visit [ArmstrongFlooring.com](https://www.armstrongflooring.com)

for complete Product, Technical,
Adhesives, Installation and
Maintenance recommendations.

Print#: FP7440F10140-122

Printed in USA. | Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | All other trademarks are owned by AFI Licensing LLC. | © 2022 AFI Licensing LLC.
FloorScore® is a registered trademark of the Resilient Floor Covering Institute. | LEED® is a registered trademark of the United States Green Building Council.
Well Building Standard® is a registered trademark of the International Well Building Institute.™