



L7511 Caramelo, L7528 Pearl



Conjunction™ 4.5 mm
Loose Lay Luxury Flooring

The Benchmark of Tough, Balanced with Design

Conjunction™ is defined by relationships: how materials interact, how visuals flow, and how performance confidently supports the experience. This collection is engineered to outperform the competition, but still provides sought-after designs and colors. Plus, its 4.5 mm profile provides the option to use alone or be transitional - aligning with other flooring profiles.

Conjunction's durability is game-changing. It's 4X more resistant to residual and static load indentation, impact and rolling load performance than competitors. Conjunction has our Diamond 10® technology that delivers unparalleled durability, resisting scratches, stains, and scuffs. It provides low-maintenance and helps keep floors looking newer, longer.

 **Diamond 10**
Technology®







L7140 Fog
9 in. x 48 in.



L7519 Dune Wind
9 in. x 48 in.



L7522 Light
9 in. x 48 in.



L7528 Pearl
9 in. x 48 in.



L7331 Mortar
9 in. x 48 in.



L7539 Harvest
9 in. x 48 in.



L7511 Caramelo
9 in. x 48 in.



L7154 Isle of Skye
9 in. x 48 in.



L7125 Nutmeg
9 in. x 48 in.



L7132 Midsummer
9 in. x 48 in.



L7127 Essex
9 in. x 48 in.



L7273 Arabica
9 in. x 48 in.



Visual Beauty That Connects and Aligns

Conjunction™ brings design and performance into a deliberate relationship. Like a celestial conjunction, its strength comes from balance—where nature-inspired visuals and durability coexist without competing for attention.

The visuals reflect nature's intelligence: predominantly wood, complemented by select stone and textile accents. A restrained, biophilic palette grounds the collection in warmth and clarity, allowing each SKU to stand confidently on its own while remaining visually compatible with the rest.

The collection is designed for spaces where everything must work beautifully, together.



L7518 Rustle
9 in. x 48 in.



L7520 Ember
9 in. x 48 in.



L7514 Auburn
9 in. x 48 in.



L7133 Polar Night
9 in. x 48 in.



L7510 Flint
9 in. x 48 in.



L7251 Natterhorn
9 in. x 48 in.



L7252 Kilimanjaro
9 in. x 48 in.



L7253 Uluru
9 in. x 48 in.



L7521 Earthbound
9 in. x 48 in.



L7511 Caramelo, L7528 Pearl



L7127 Essex



L7519 DuneWind



Putting Your Best Foot Forward

Hospitality spaces are meant to encourage fun, relaxation, laughter, celebration and even rest. Guests should be focused on their experience and managers should be confident their environments can handle what comes along. From dancing in high heels to dropped dishes, and dog claws to rolling suitcases, Conjunction™ handles it all and looks fantastic.

This collection is **4X more resistant to indents, rolling loads, and impacts than competitors** and its 4.5mm profile makes it the perfect **transitional flooring** choice. All this plus our **Diamond 10®** coating that resists stains and withstands heavy foot traffic. Now that's cause for celebration.





Welcoming Spaces Support Wellness

Healthcare spaces should feel safe, clean, and professional. Conjunction is where performance intersects with aesthetic – floors that ground while ensuring they will meet the demands found in healthcare. From nurses' stations and lobbies to patient rooms and waiting rooms, our designs bring the calming serenity of nature indoors.


Conjunction™ 4.5 mm is

4X More Resilient To


Residual Indent (short-term indentation)

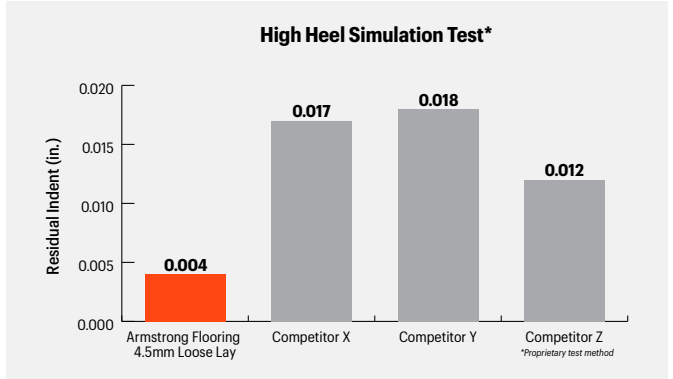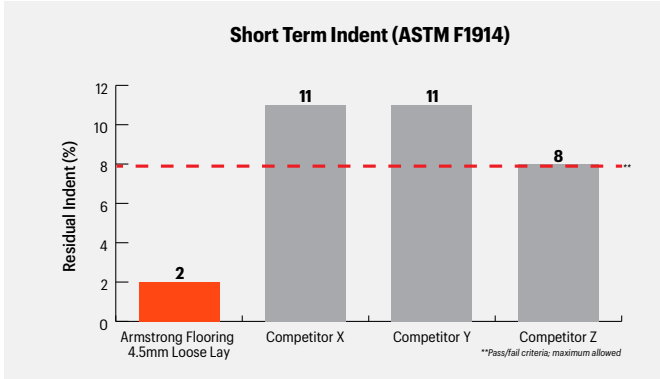


Static Loads (long-term indentation)

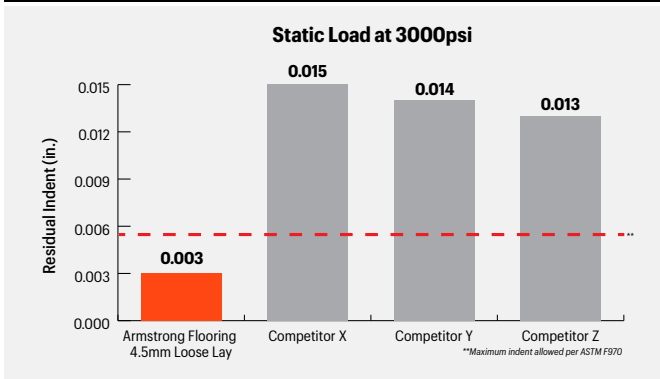

Impacts

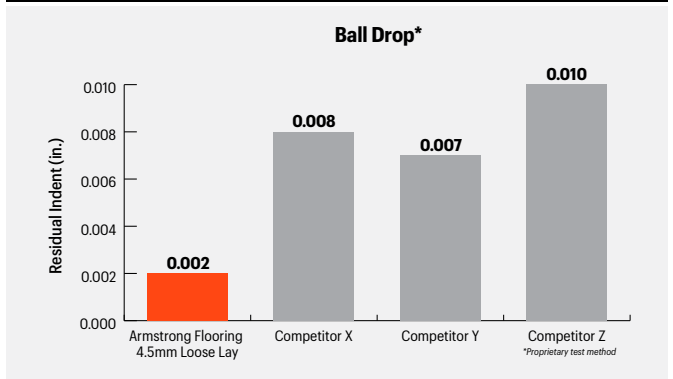

Rolling Loads

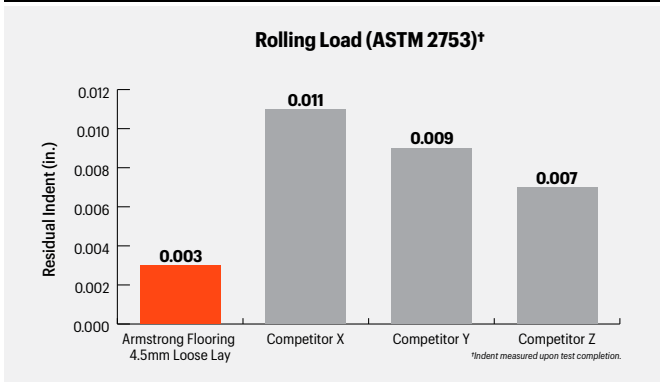

L7520 Ember

Than Leading Competitors


*Based on AHF proprietary tests.



L7520 Ember, L7522 Light

Built to Last from Top to Bottom

Conjunction™ features a robust construction with our durable Diamond 10® coating and sturdy core designed to withstand heavy foot traffic and prevent scratches and dents.

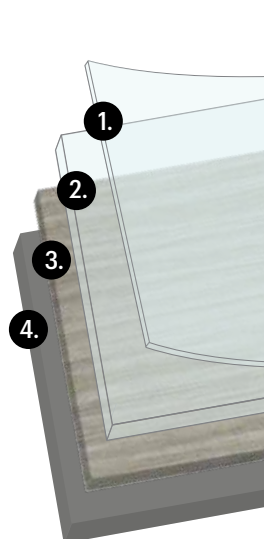

1. Diamond 10® Technology

Patented innovation that uses diamonds to provide category-leading scratch, stain, and scuff resistance from edge-to-edge


2. Rigid Wear Layer

The combination of Diamond 10 technology and the unique rigid wear layer results in enhanced durability and abrasion resistance

3. Realistic Printed Visual

4. Foundation Layer - Square Edge



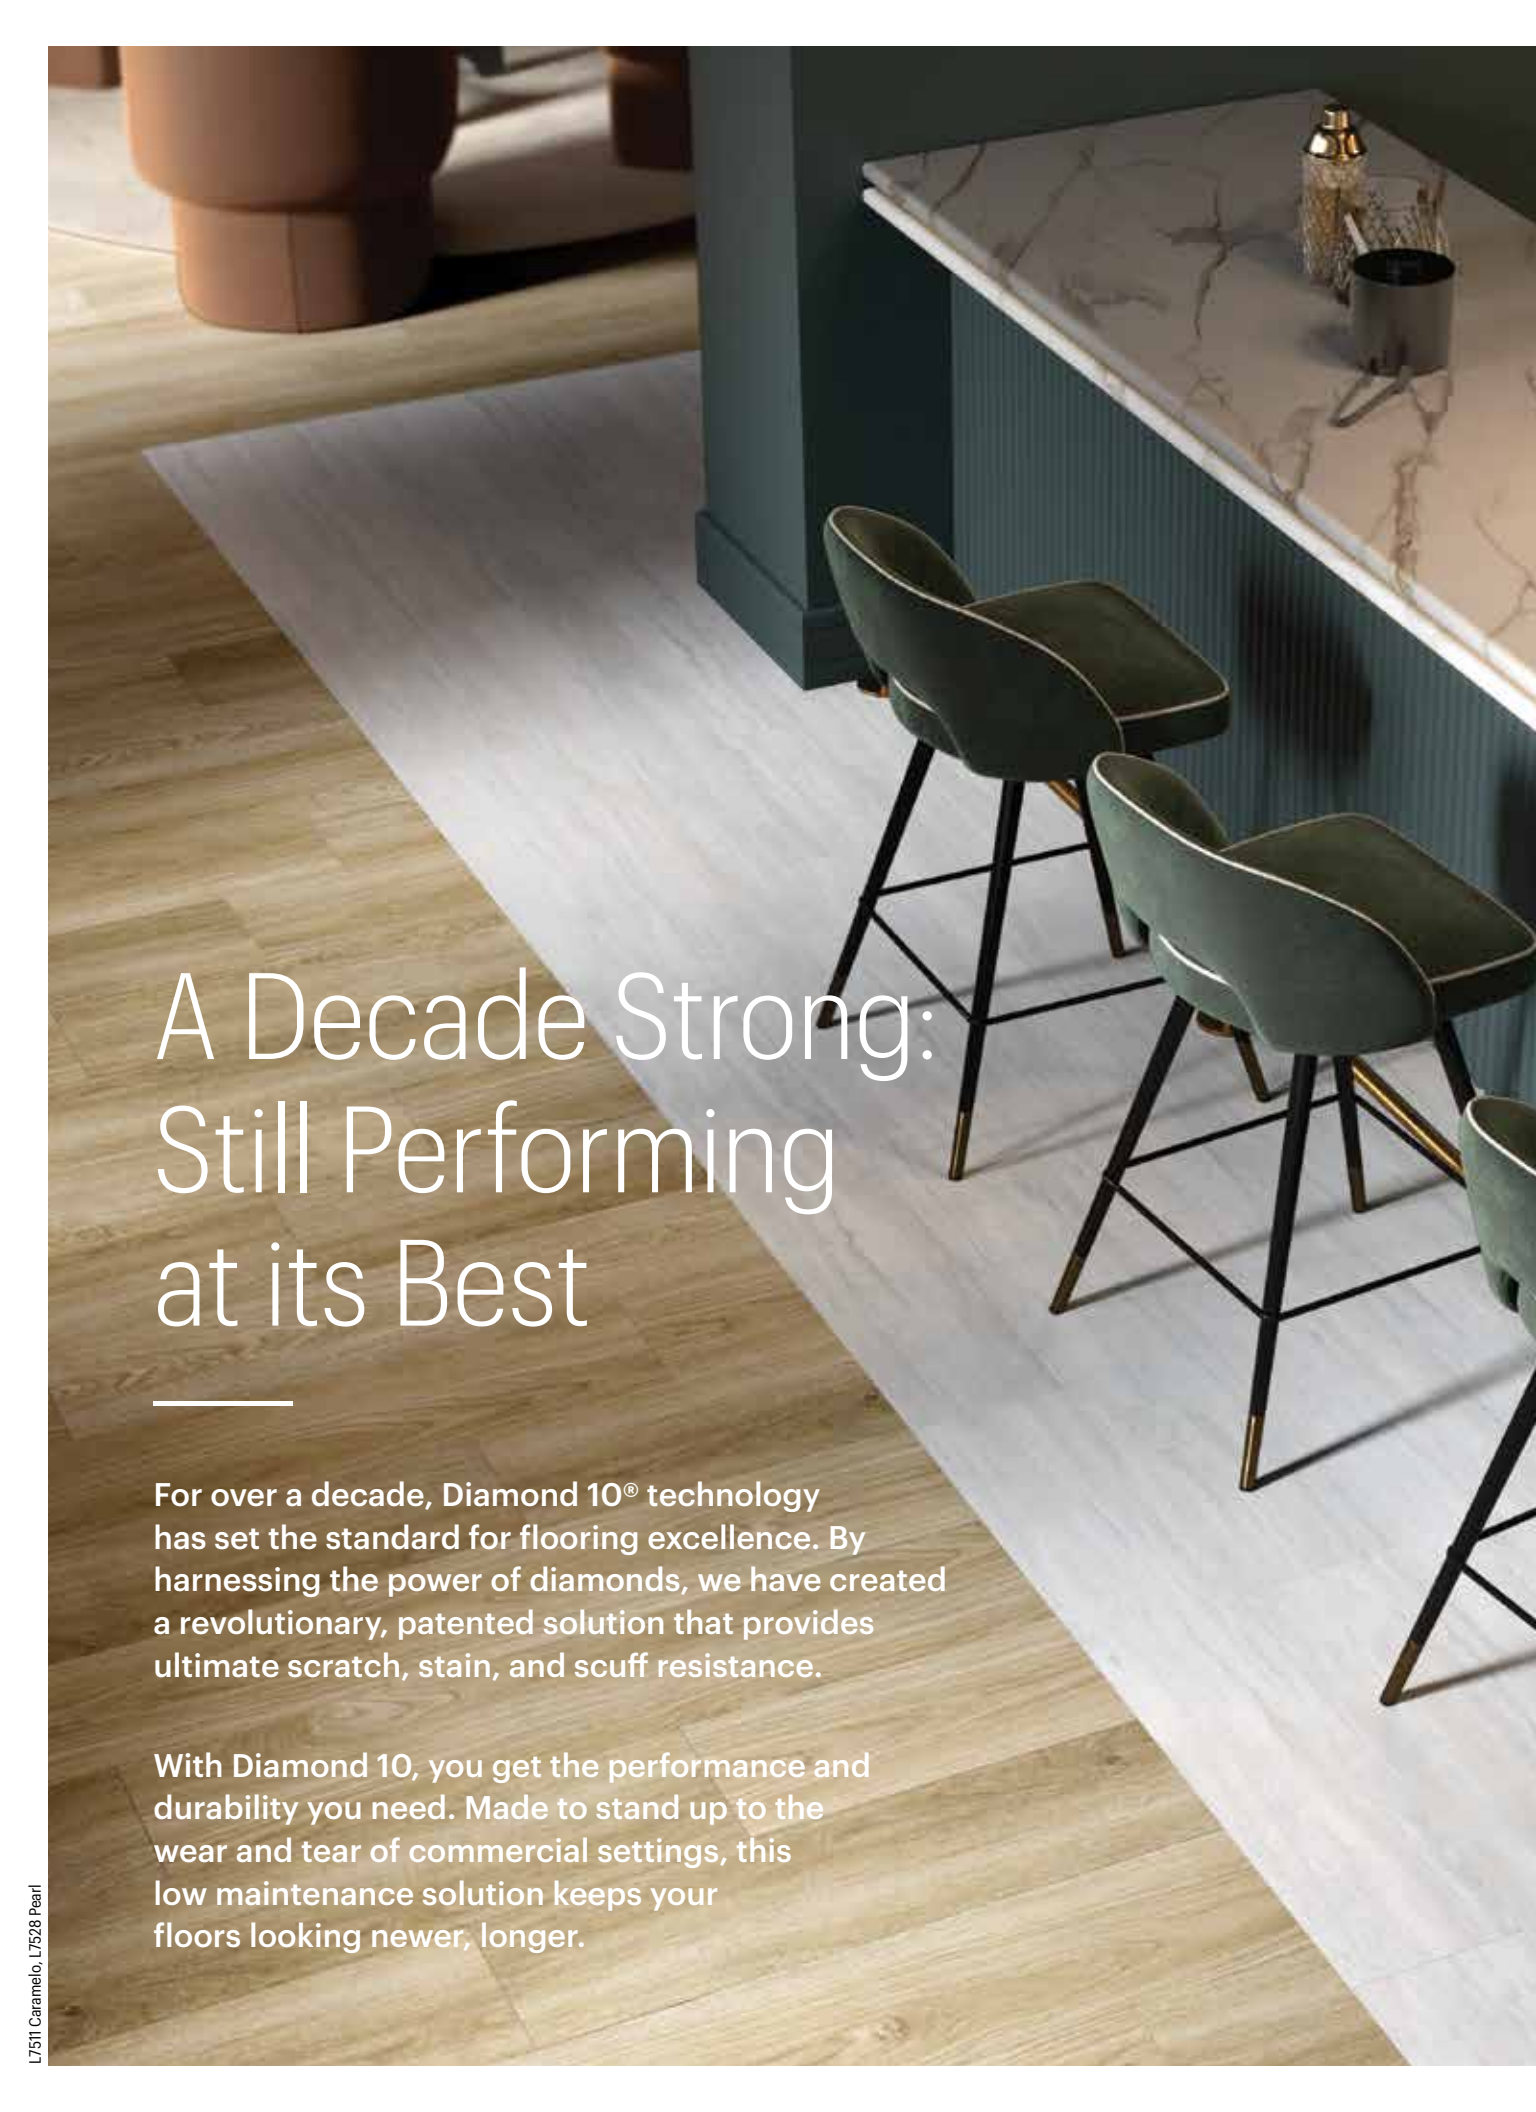

A Decade Strong: Still Performing at its Best

For over a decade, Diamond 10® technology has set the standard for flooring excellence. By harnessing the power of diamonds, we have created a revolutionary, patented solution that provides ultimate scratch, stain, and scuff resistance.


With Diamond 10, you get the performance and durability you need. Made to stand up to the wear and tear of commercial settings, this low maintenance solution keeps your floors looking newer, longer.



Industry-Leading Protection, Backed by Science

Diamonds are nature's hardest minerals, symbolizing lasting quality. Our Diamond 10 technology harnesses the same resilient properties of natural diamonds. The result yields a protective technology unmatched in performance and durability.

Diamonds outperform all other common competitive flooring finishes on the Mohs scale of mineral hardness, which characterizes the scratch resistance of various materials. **Our technology scores a perfect 10 on the scale!**

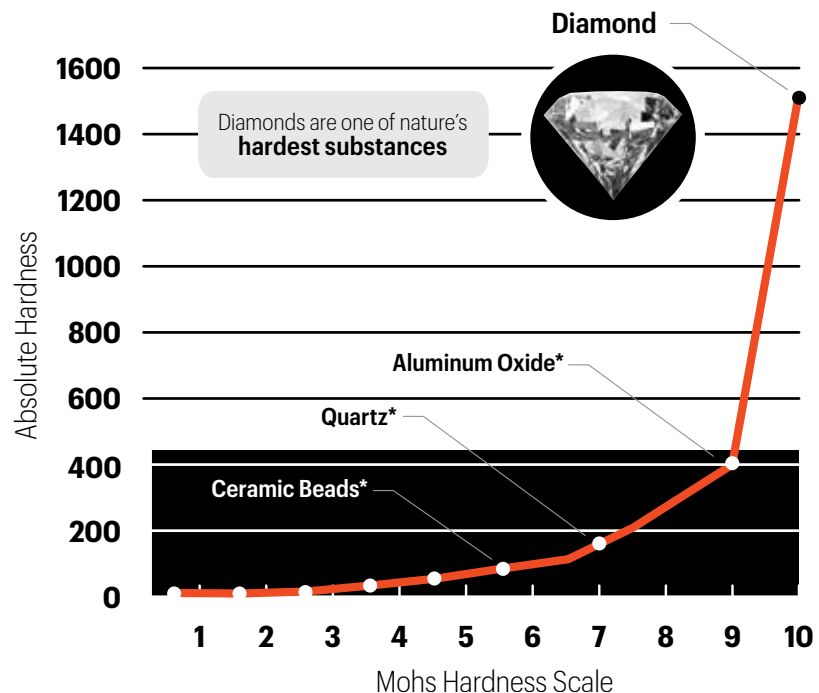

Unmatched Durability, Unmatched Performance

Conjunction™ with Diamond 10® technology delivers best in category scratch, stain and scuff resistance and reduced maintenance cost over the life of the floor.

Scratch Performance – withstands the rigors of commercial use, including heavy foot traffic, furniture and equipment movement, and accidental drops.



Armstrong Flooring LVT



Competitor A



Competitor B



Competitor C

Observe the residue buildup on the brown pads after scratching with a 12.5 lb. load for 20 passes, simulating commercial traffic, revealing the coating being scratched off the surface.

Stain Resistant – resists stains from common commercial settings including permanent marker, dry erase, red food color, povidone-iodine, and hair dye.



Armstrong Flooring LVT



Competitor A



Competitor B



Competitor C

Seeing is believing – after scratching the sample, it was stained, then wiped with a dry paper towel and an alcohol wipe.



Finishing Touches

As your single-source provider, Armstrong Flooring® offers a comprehensive range of accessories to complete your project, including installation adhesives, maintenance products, wall base, and weld rods. From start to finish, we have you covered.

S-319 Roll Strong™ Adhesive

- One coat, rolled on application
- Traffic and rolling loads are allowed on the floor immediately after installation
- Suitable for heavy rolling load traffic
- Solvent free

S-995 Flooring Adhesive

- Moisture guaranteed up to 95% RH
- Use in areas with concentrated static & dynamic loads
- Includes Underbed Warranty

S-1000 Flooring Adhesive

- High-moisture guarantee up to 100% RH
- Simple one-part system (modified urethane)
- Fast-curing formula with strong, early grab
- Use over porous substrates only
- Ideal for areas with direct sunlight, topical moisture or temperature fluctuations

S-730 Wall Base Adhesive

- No open time – immediate installation
- Easy clean up
- Strong tack (green grab)



30-Year Commercial Limited Warranty
when installed with a recommended Armstrong Flooring adhesive - see warranty for details.



Made in USA
with U.S. and global content.




Adhesive	RH Limit	pH Limit	MVER Limit	Spread Rate	Open Time	Working Time	Low Traffic	High Traffic	Shelf Life
S-319	99%	12	12 lbs	300-400 sq. ft. / gal.	15 Min.	4 Hrs	0	0	1 Year
S-995	95%	10	-	220-260 sq. ft. / gal.	10-45 Min.	2 Hrs	24 Hrs	48 Hrs	2 Years
S-1000	100%	14	25 lbs	220-260 sq. ft. / gal.	10-20 Min. Set-in-wet	45 Min	3 Hrs	8 Hrs	1 Year
S-730	-	-	-	220 - 250 lin. ft. / gal. (4 in. base)	0 Min.	15 Min	-	-	1 Year



Scan to view our complete line of installation, maintenance, and accessories.



FLOOR
Expert
Expert advice: product, installation & maintenance.

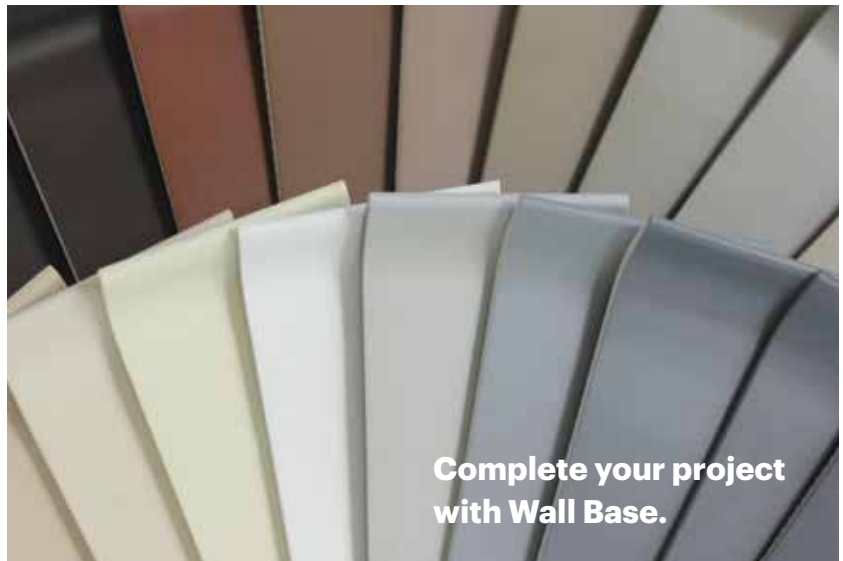

Complete your project with Wall Base.



L7520 Ember, L7528 Pearl, Gemini Panels

Rooted in America Built for America

We share your commitment to transparency and building a better environment together.

- FloorScore® certified for low VOC emissions.
- Free of ortho-phthalates and heavy metals.
- Third-party verified Health Product Declaration (HPD).
- Third-party certified Environmental Product Declaration (EPD).
 - Lower carbon footprint compared to industry-wide EPD.
- Light Reflectivity Values available – significantly impacts the distribution of natural and artificial lighting, offering energy and cost savings.
- Made in USA with U.S. and global content.
 - Reducing transport emissions and environmental impact.

Product Information

Construction - Solid Vinyl Tile (Luxury Vinyl Tile / LVT)

International Specifications - ASTM F1700, Class III,
Type B, embossed surface

Overall Thickness - 4.5 mm / 0.178 in.

Wear Layer Thickness - 0.020 in. (0.5mm)

Factory Finish - Diamond 10® Technology

Installation - Adhesives: S-319 Roll Strong™, S-995, S-1000, S-730 for Wall Base

Maintenance Options - No Polish – No Buff, Polish Optional

Color and visual variation is inherent in all resilient products. Prior to installation, we recommend reviewing multiple tiles or planks.

ArmstrongFlooring®

 Diamond 10
Technology



Visit ArmstrongFlooring.com

for complete Product, Technical,
Adhesives, Installation and
Maintenance recommendations.

Print#: 7440ConjunLIT-326

Printed in USA. | The FSC logo is owned by the Forest Stewardship Council. FloorScore is a trademark of the Resilient Floor Covering Institute. All other trademarks are owned by AHF, LLC or its subsidiaries or affiliates. | ©2026 AHF, LLC.

