





MedinPure<sup>™</sup> PVC-Free
Homogeneous Sheet

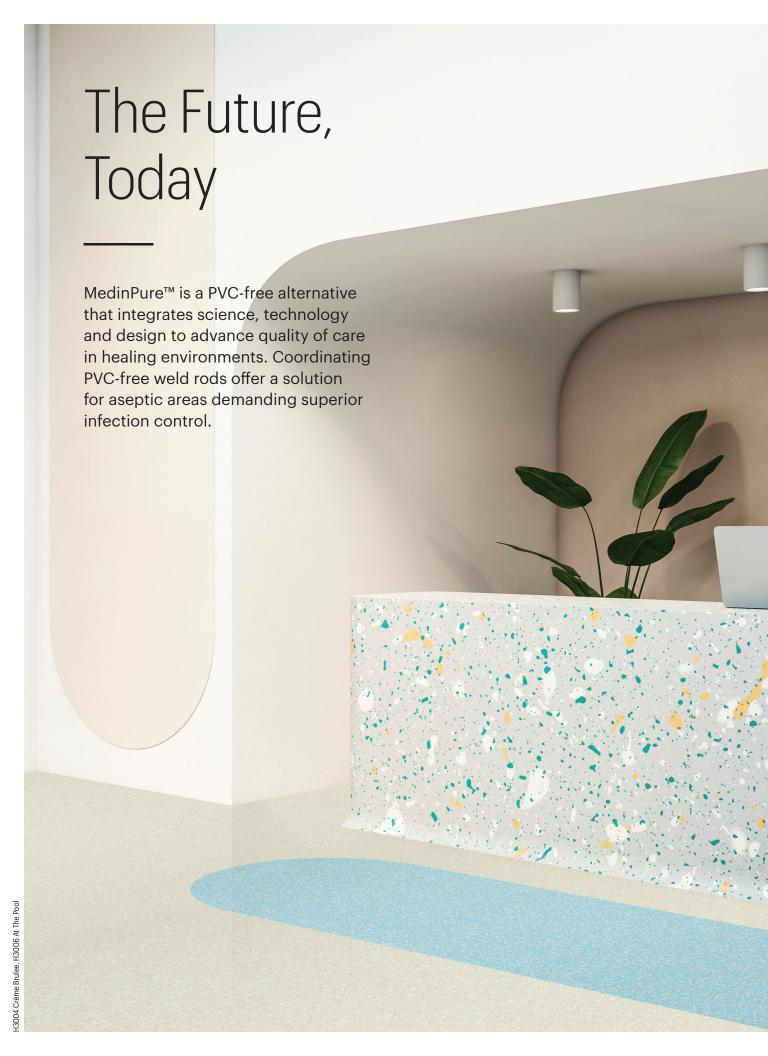

# Reconnect with Nature

Inspired by nature, the MedinPure color palette thoughtfully connects us with the natural world – bringing a sense of serenity indoors. Soothing neutrals and tranquil colors can be combined to assist in wayfinding and create calm, comfortable spaces designed to promote healing.

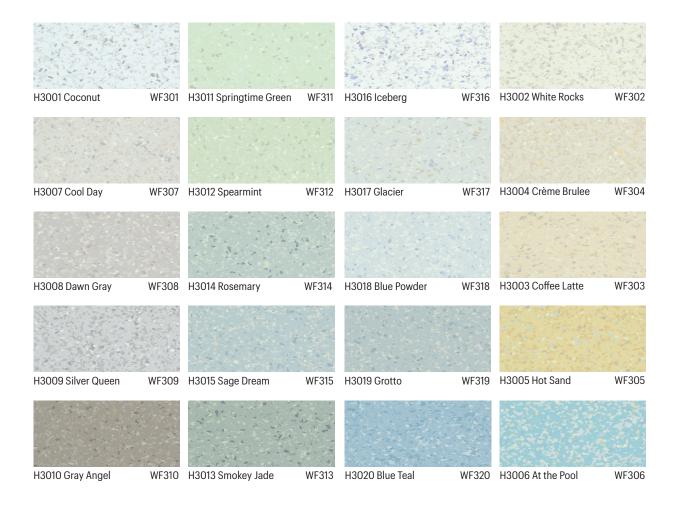


## Building Better



### We share your commitment to transparency and building a better environment together:

- PVC-free formulation with coordinating PVC-free weld rods for aseptic areas demanding superior infection control.
- Low VOC emissions and FloorScore® certified.
- Free of Plasticizers, Ortho-Phthalates, Halogens, Isocyanates and Red List Chemicals of Concern.
- LEED v4 contributing Health Product Declaration (HPD) and Environmental Product Declaration (EPD).

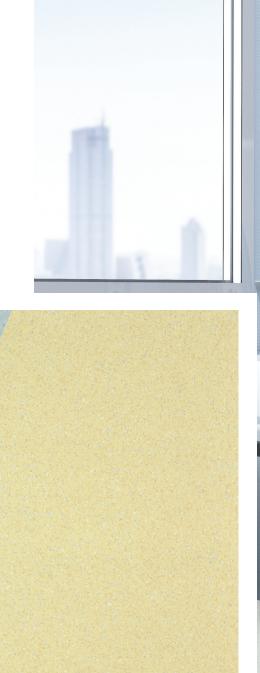



Superior infection control with heat welded seams for spaces demanding enhanced sterilization.






## Diamond 10<sup>®</sup> Technology

Diamond 10 Technology coating provides the ultimate scratch, stain, and scuff resistance. It's a no-polish, easy-to-clean solution that is designed to look beautiful for years to come, despite daily maintenance and rigorous disinfection protocols.

- Protects against scratches, stains, and scuffs for floors that look newer, longer.
- Offers ease of maintenance no polishing, stripping, or restorative maintenance required.



H3001 Coconut, H3013 Smokey Jade



- 1. Diamond 10® Technology
- 2. Through Pattern Wear Layer

#### 10 Year Commercial Limited Warranty

Supported by a 10 Year Commercial Warranty. Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products. Visit armstrongflooring.com for more information.

#### **Product Information**

Construction - PVC-Free Homogeneous Sheet

International Specifications - ASTM F1913\*, EN 14565, ISO 10581\*

Overall Thickness - 0.080 in. (2.0 mm)

Wear Layer Thickness - 0.080 in. (2.0 mm)

Size - Up to 75.46 ft (23 m) 6.56 ft. (2.0 m) Factory Finish - Diamond 10® Technology

Installation - Full Spread Adhesive: S-319 Roll Strong™, S-995.

Seams: Heat Weld with PVC-Free Weld Rods or S-761 Seam Adhesive

Maintenance Options - No Polish - No Buff, Polish Optional

\*Performance requirements only; product is free of halogens, including chlorine (PVC), fluorine, bromine, iodine.

Shade may vary from sample.



Walk On. Walk Strong:







#### Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.

#### Print# F10746-22