

Product Information

Product Lines - Coved Wall Base & Sculptured Wall Base

Construction - Thermoplastic Rubber

Product Specifications - Coved Wall Base - ASTM F1861, Type TP, Group 1, Style B

Sculptured Wall Base - ASTM F1861, Type TP, Group 1, Style A

Overall Thickness - Coved Wall Base - 0.125 in. (3.18 mm)


Sculptured Wall Base - 0.25 in. (6.35 mm)

Installation - S-730 Wall Base Adhesive


Packaging

Products	Height	Feet per Carton	Piece per Carton
Coved - Sticks	4.0 in. (101.6 mm)	120 lin. ft. (36.57 m)	30
Coved - Rolls			1
Sculptured	4.5 in. (114.3 mm)	48 lin. ft. (14.63 m)	6


Product Structures

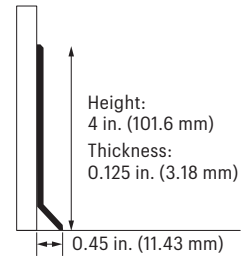

Coved Wall Base



Sculptured Wall Base



Testing

Performance	Test Method	Requirement	Performance vs. Requirement
Composition of Materials	Certificate of Compliance	As specified	Meets
Wear Layer Thickness	ASTM F410	≥ 0.002 in.	Meets
Flexibility	ASTM F137	¼ inch mandrel no cracks or breaks in wear surface	Meets
Staining of adjacent surfaces induced by wall base	ASTM F1861 Section 12	No staining of adjacent surfaces	Meets
Resistance to Light	ASTM F 1515	Max. avg. ΔE ≤ 8	Meets
Resistance to Chemicals	ASTM F 925	No more than slight change in surface dulling, attack or staining	Meets
Dimensional Stability	ASTM F1861 Section 12	±0.25%	Meets
Height	ASTM F1861 Section 9	As specified, ±1% of nominal height	Meets
Thickness	ASTM F386	As specified, 0.080 in. +0.015/ -0.005 in. 0.25 in. + 0.015/ -0.015 in.	Meets
Length	ASTM F1861 Section 9	As specified, no less than nominal value	Meets
Additional Testing			
Fire Test Data – Flame Spread	ASTM E 648	0.45 W/cm ² or more Class I	Meets
Fire Test Data – Smoke Evolution	ASTM E 662	450 or less	Meets

Sustainability

Certification Attribute	Standard	3rd party Certification/Certifier
Low-Emitting Material	CDPH v1.2 (2017) a.k.a CHPS 01350	FloorScore®/SCS
Low-Emitting Adhesive (S-730)	CDPH v1.2 (2017) a.k.a CHPS 01350	FloorScore®/SCS

ACCESSORY PRODUCTS


Sustainability Continued

Performance	Standard	Requirements	Performance vs. Requirements
TVOC Range	CDPH v1.2 (2017) a.k.a CHPS 01350	<0.5 mg/m³	Meets
Low Emitting Adhesives (S-725)	SCAQMD Rule #1168	Less than 50 g/L	S-730 Exceeds - 0 g/L
Fundamental Material Safety Toxic Material Reduction	WELL™ Feature 11 and 25	No asbestos, free of lead and phthalates (DEHP, DBP, BBP, DIDP, DNOP)	Meets

Limited Warranty

15-year Commercial Warranty. The product warranty will be reduced by 10 years if recommended Armstrong Flooring® adhesive are not used during installation.

4 ft. Sticks - R41XX
 Roll Cove - R48XX

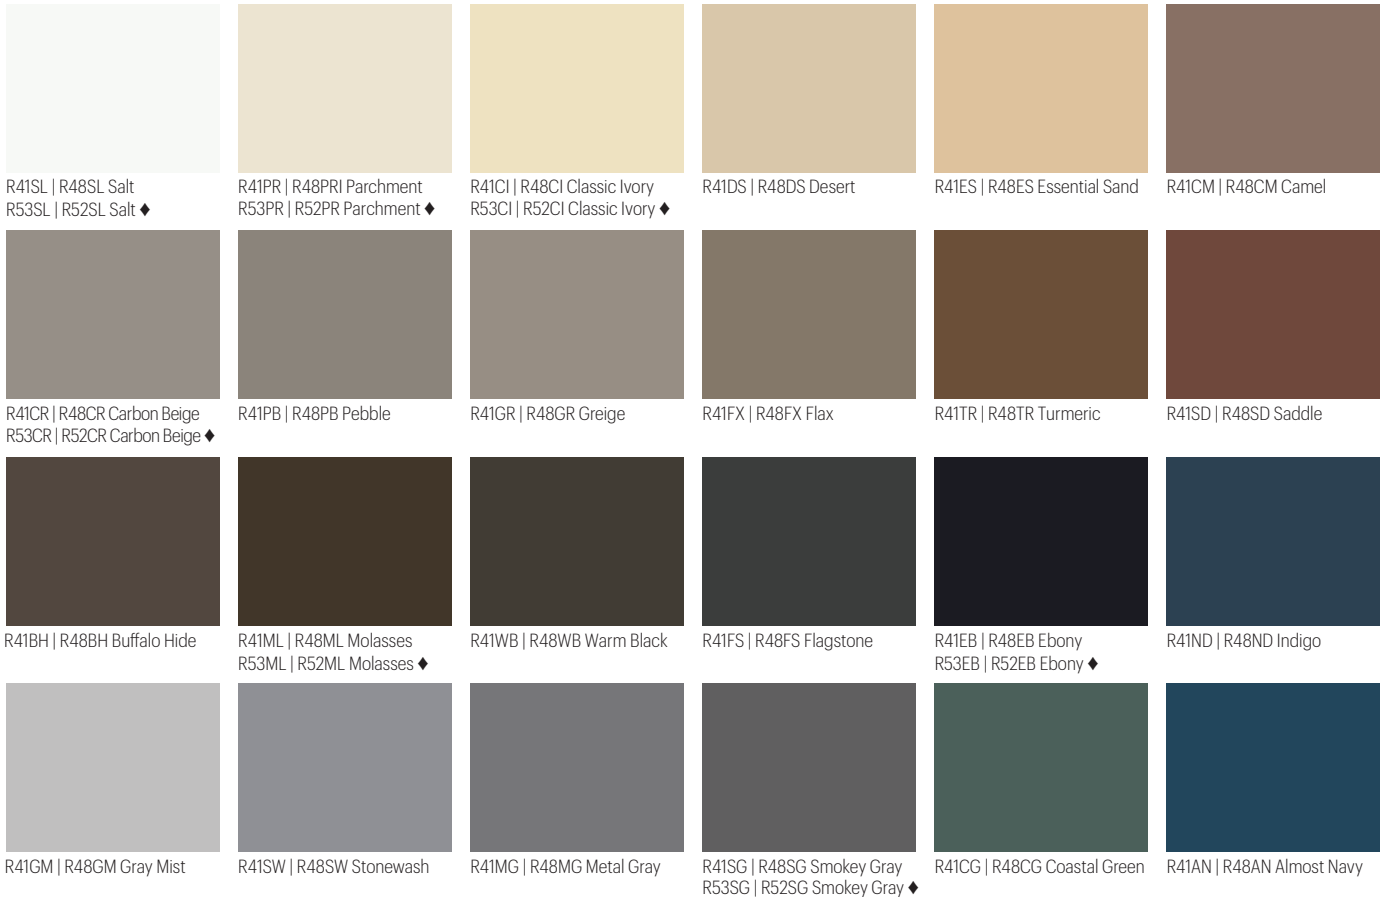

♦ Available in Sculptured Wall Base
 Profile 1 - R53XX
 Profile 2 - R52XX

Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation & Maintenance recommendations.

7440F10440-326

FloorScore® is a registered trademark of the Resilient Floor Covering Institute. | LEED® is a registered trademark of the United States Green Building Council. All other trademarks are owned by AHF, LLC, or its subsidiaries or affiliates. | © 2026 AHF, LLC.



Made in USA
 with U.S. and global content.