

Product Information

Construction - Vinyl Composition Tile


International Specifications - ASTM F1066 - Class 2 Through Pattern

Overall/Wear Layer Thickness - 1/8 in. (3.2 mm)

Factory Finish - Fast Start®

Installation - Adhesives: S-515 Tile Strong, S-319 Roll Strong, S-1000, Flip® Spray

Maintenance Options - Polish

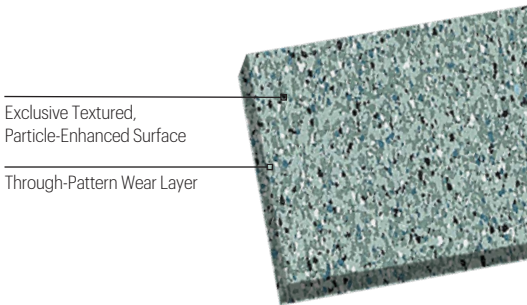

Packaging

Size	Pieces per Carton/Coverage	Shipping Weight per Carton
12 in. x 12 in. (305 mm x 305 mm)	12 in. x 12 in. – 12 (45 sq. ft.) 4.18 m²	63 lbs. (28.6 kg)

Testing

ASTM F1066			
Performance	Test Method	Requirement	Performance vs. Requirement
Thickness	ASTM F386	Nominal ± 0.005 in.	Meets
Size	ASTM F2055	± 0.016 in. per linear foot	Meets
Squareness	ASTM F2055	0.010 in. maximum	Meets
Dimensional Stability	ASTM F2199	≤ 0.024 in. per linear foot max.	Meets
Chemical Resistance	ASTM F925	No more than slight change in surface dulling, attack or staining	Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8	Meets
Additional Testing			
Static Load Resistance	ASTM F970*	< 0.005 in.	800 psi
Static Load Resistance @ 125	ASTM F970	< 0.005 in.	Meets
Fire Test Data – Flame Spread	ASTM E648	0.45 W/cm² or more Class 1	Meets
Fire Test Data – Smoke Evolution	ASTM E662	450 or less	Meets
Fire Test Data – Canada	CAN/ULC S-102.2	Use dependent	Flame Spread - 0 Smoke Developed - 30
Static Coefficient of Friction**	ASTM D2047/UL 410	≥ 0.5	Meets
ADA Standards for Accessible Design	Chapter 3 Section 302.1	Floor surfaces shall be stable, firm and slip-resistant	Meets

Sustainability

WELL v1 Feature		Safety Zone Tile	Contribution
Air	Feature 04 - VOC Reduction	✓	Tested and third party certified by FloorScore® as complying with CDPH v1.2
	Feature 11 - Fundamental Material Safety	✓	Product is free of asbestos and added lead (Part 1)
	Feature 25 - Toxic Material Reduction	✓	Free of flame retardants (Part 2)
Mind	Feature 97 - Material Transparency	✓	Readily available Health Product Declaration® (HPD) to 1000 ppm
	Feature 88 (Part 2) Biophilia I - Qualitative	✓	Products available that incorporate nature patterns
	Feature 99 - Beauty and Design II	✓	Provided patterns and colors to aid in wayfinding and spatial familiarity (Part 3)
WELL v2 Feature		Safety Zone Tile	Contribution
Air	Feature X12 - Short Term Emission Control	✓	Adhesives associated with product are tested and third party certified by FloorScore as complying with CDPH v1.2
	Feature X11 Long-Term Emission Control	✓	Flooring is tested and third party certified by FloorScore as complying with CDPH v1.3
	Feature X01 Fundamental Material Precautions	✓	Product is free of asbestos
	Feature X10 Volatile Organic Compound	✓	Free of flame retardants (Part 2)
Materials	Feature X14 Material Transparency	✓	Readily available Health Product Declaration (HPD) to 1000 ppm
	Feature M02 Access to Nature	✓	Products available that incorporate nature patterns
Mind	Feature C13 (Part 2) Accessibility and Universal Design	✓	Provided patterns and colors to aid in wayfinding and spatial familiarity
Community			
LEED™ v4.1		Safety Zone Tile	
BPDO - EPD		Product Specific certified by ASTM International	
BPDO - Material Ingredient		HPD	
BPDO - Sourcing		Recycled Content – 40% Pre-Consumer	
Location of Manufacturer		USA	
Low Emitting Flooring		Tested and third party certified by FloorScore as complying with CDPH v1.2	
Low Emitting Adhesives		Tested and compliant to CDPH v1.2; Methylene Chloride and Perchloroethylene not intentionally added; FloorScore Certified	
SCAQMD #1168 Compliant.		S-319 - 0 g/L	
Adhesives meet <50 g/L requirement.		S-515 - 0 g/L	
		S-1000 - 0.1 g/L	
		Flip® Spray - 0 g/L	
Carbon Footprint		Safety Zone Tile	
Global Warming Potential, including Biogenic Carbon		0.33 Kg CO² eq. / square foot	
Raw Materials (A1) through Production (A3)		(3.52 Kg CO² eq. / square meter)	

Limited Warranty

5-year Commercial Warranty when installed in strict accordance with the detailed instructions.

Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation & Maintenance recommendations.

F9418-724
Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | © 2024 AHF Products LLC. | FloorScore® is a registered trademark of the Resilient Floor Covering Institute. LEED® is a registered trademark of the United States Green Building Council. The Health Product Declaration® is a registered trademark of HPD Collaborative. All other trademarks are owned by AHF Products LLC.

*Testing at loads above 250 psi is outside the scope of the test method. Since testing is conducted on uninstalled flooring, results do not consider the performance of the adhesive, underlayment, or subfloor. These test results are not an indicator of the installed flooring system performance. **Using the James Machine as described in D2047 and as directed in UL 410 for floor covering materials (FCM) using a leather foot under dry conditions. The application of site-applied floor sealers, polishes and other types of finishes routinely used to maintain resilient flooring materials will change the walking surface and consequently the SCOF value.

