

PVC-FREE HOMOGENEOUS SHEET FLOORING

MedinPure®

Product Information

Construction - Homogeneous

International Specifications - ASTM F1913*, EN 14565, ISO 10581*

Overall Thickness - 0.08 in. (2.0 mm)


Wear Layer Thickness - 0.08 in. (2.0 mm)

Factory Finish - Diamond 10® Technology with Enhanced Traction

Installation - Full Spread Adhesive: S-995, S-1000

Heat Weld with PVC-Free Weld Rods or S-763 Seam Adhesive.

Maintenance Options - Polish, No Polish - Spray Buff, No Polish - No Buff

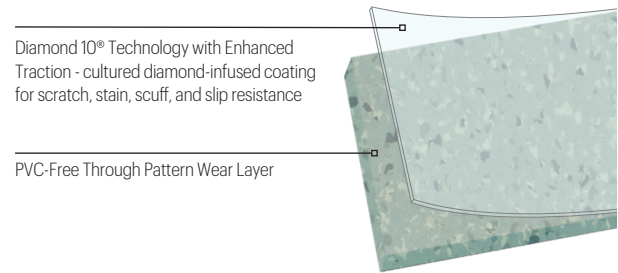

Packaging

Roll Length	Roll Width	Shipping Weight
Up to 75.46 ft. (23 m)	6.56 ft. (2.0 m)	Approx. 283.70 lbs. per roll (128.66 kg)

Testing

ASTM F1913*			
Performance	Test Method	Requirement	Performance vs. Requirement
Thickness	ASTM F386	≥ 0.075 in.	Meets
Residual Indentation	ASTM F1914	≤ 0.007 in.	Meets
Static Load Resistance @ 250 psi	ASTM F970	≤ 0.005 in.	Meets
Flexibility	ASTM F137	1½ in. mandrel no cracks or breaks in wear surface	Meets
Resistance to Chemicals	ASTM F925	No more than slight change in surface dulling, attack or staining	Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8	Meets
Resistance Light	ASTM F1515	ΔE ≤ 8	Meets
EN 14565 and ISO 10581*			
Overall Thickness	ISO 24346	Nominal value +0.13 mm / -0.10 mm	Meets
Mass per unit area	ISO 23997	+13% / -10%	Meets
Residual Indentation	ISO 24343-1	≤ 0.10 mm	Meets
Dimensional Stability	ISO 23999	≤ 0.20% expansion/shrinkage ≤ 8 mm curling	Meets
Flexibility	ISO 24344, Method A	20 mm mandrel	Meets
Color fastness to artificial light	ISO 105-B02, Method 3	6 minimum	Meets
Seam Strength	EN 684	Average ≥ 240 N/50 mm	Meets
Additional Testing			
Fire Test Data – Flame Spread	ASTM E648	0.45 W/cm² or more Class 1	Meets
Fire Test Data – Smoke Evolution	ASTM E662	450 or less	Meets
Fire Test Data – Canada	CAN\ULC S-102.2	Use dependent	Flame Spread - 70 Smoke Developed - 245
Static Load Resistance	ASTM F970**	< 0.005	Information Coming Soon
Wear Group Classification per EN649-volume loss	EN660-2	–	Wear Group T ≤ 2.0 mm³
Bacteria Resistance	ISO 846: PART C	–	No Observed Growth
Ramp Test	DIN 51130	–	R10
Isocyanate Content	ISO14896	–	None Detected
ADA Standards for Accessible Design	CHAPTER 3 SECTION 302.1	Floor surfaces shall be stable, firm and slip-resistant	Meets
Antistatic Properties	EN 1815	≤ 2.0 kV	Meets (antistatic)
Static Coefficient of Friction***	ASTM D2047/UL 410	≥ 0.6	Meets
Acoustics	ASTM E492	Impact Insulation Class	IIC – 41 (6" concrete - no ceiling)
	ASTM E2179	Sound Transmission Class	STC – 53 (6" concrete - no ceiling)
	ASTM E90	Sound Transmission Reduction	Delta IIC (IIC) – 13
	ASTM E3133	Radiated Impact Sound	LWA 88 (6" concrete - no ceiling)
	ISO 10140-3	Impact Sound Insulation	Delta LW (LW) – 6dB

PVC-FREE HOMOGENEOUS SHEET FLOORING

MedinPure®

Sustainability

WELL v1 Feature		MedinPure	Contribution
Air	Feature 04 - VOC Reduction	✓	Tested and third party certified by FloorScore® as complying with CDPH v1.2
	Feature 11 - Fundamental Material Safety	✓	Product is free of asbestos and added lead (Part 1)
	Feature 25 - Toxic Material Reduction	✓	Free of flame retardants (Part 2) and phthalates (Part 3)
Mind	Feature 97 - Material Transparency	✓	Readily available Health Product Declaration® (HPD) to 1000 ppm
	Feature 88 (Part 2) Biophilia I - Qualitative	✓	Products available that incorporate nature patterns
	Feature 99 - Beauty and Design II	✓	Provided patterns and colors to aid in wayfinding and spatial familiarity (Part 3)
WELL v2 Feature		MedinPure	Contribution
Materials	Feature X01.1 Material Restrictions	✓	Product is free of asbestos
	Feature X05.1 Enhanced Material Restrictions	✓	Free of flame retardants (Part 2) and phthalates (Part 3)
	Feature X06.1 VOC Restrictions	✓	Adhesives associated with product are tested and third party certified by FloorScore as complying with CDPH v1.2
	Feature X06.2 VOC Restrictions	✓	Flooring is tested and third party certified by FloorScore as complying with CDPH v1.2
	Feature X07.1 Material Transparency	✓	Readily available Health Product Declaration (HPD) to 1000 ppm
	Feature X08.1 Material Optimization	✓	Third party certified Red List Free Declare Label
	Feature M02.1 Nature and Place	✓	Products available that incorporate nature patterns
	Feature C13 (Part 2) Accessibility and Universal Design	✓	Provided patterns and colors to aid in wayfinding and spatial familiarity
LEED™ v4.1		MedinPure	
BPDO - EPD		Product Specific	
BPDO - Material Ingredient		Third party certified HPD and Red-List Free Declare Label	
Location of Manufacturer		China	
Low Emitting Flooring		Tested and third party certified by FloorScore as complying with CDPH v1.2	
Low Emitting Adhesives		Tested and compliant to CDPH v1.2; Methylene Chloride and Perchloroethylene not intentionally added; FloorScore Certified	
SCAQMD #1168 Compliant.		S-995 - 0 g/L	
VOC limit for flooring adhesives is <50 g/L.		S-1000 - 0.1 g/L	
Carbon Footprint		MedinPure	
Global Warming Potential, excluding Biogenic Carbon		1.34 Kg CO² eq. / square foot	
Raw Materials (A1) through Production (A3)		(14.44 Kg CO² eq. / square meter)	

Limited Warranty

10-year Commercial Warranty when installed in strict accordance with the detailed instructions.
Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products.

Visit [ArmstrongFlooring.com](https://www.armstrongflooring.com)
for complete Product, Technical, Adhesives, Installation & Maintenance recommendations.

F-10350-724
Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | © 2024 AHF Products LLC.
FloorScore® is a registered trademark of the Resilient Floor Covering Institute. | LEED® is a registered trademark of the United States Green Building Council.
The Health Product Declaration® logo is a registered trademark of HPD Collaborative. | All other trademarks are owned by AHF Products LLC.

*Performance requirements only; product is free of halogens, including chlorine (PVC), fluorine, bromine, iodine. **Testing at loads above 250 psi is outside the scope of the test method. Since testing is conducted on uninstalled flooring, results do not consider the performance of the adhesive, underlayment, or subfloor. These test results are not an indicator of the installed flooring system performance.
***Using the James Machine as described in D2047 and as directed in UL 410 for floor covering materials (FCM) using a leather foot under dry conditions. The application of site-applied floor sealers, polishes and other types of finishes routinely used to maintain resilient flooring materials will change the walking surface and consequently the SCOF value.

