

Inspiring  
Great  
Spaces™

**Armstrong®**  
**FLOORING**  
COMMERCIAL



**QUANTUM**  
COMMERCIAL FLOORING  
HOMOGENEOUS VINYL SHEET

# QUANTUM

(2.00m x 1.83m x 16m sheet)



P4

R10

SLIP RESISTANCE




PITT BLACK

LRV 10.84



COLLINS GREY

LRV 24.42

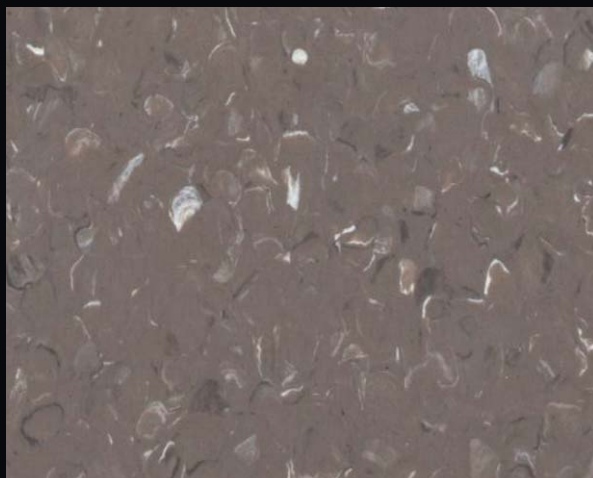


CHAPEL BROWN

LRV 21.30




ESSEX BEIGE

LRV 40.99

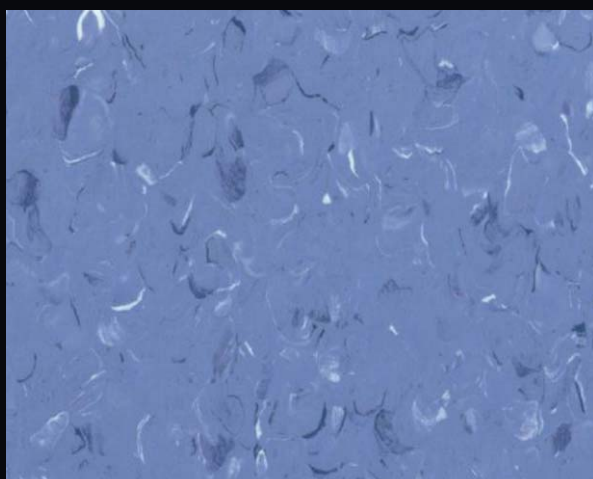

BURKE BLUE

LRV 23.20

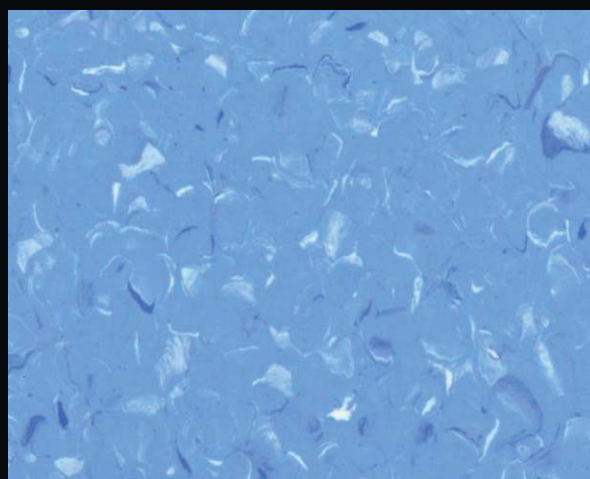

COLLEGE BLUE

LRV 30.70

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Samples are for display purposes. Gauge may vary from actual material.



# QUANTUM


(2.00mm x 1.83m x 16m sheet)



P4

R10

SLIP RESISTANCE

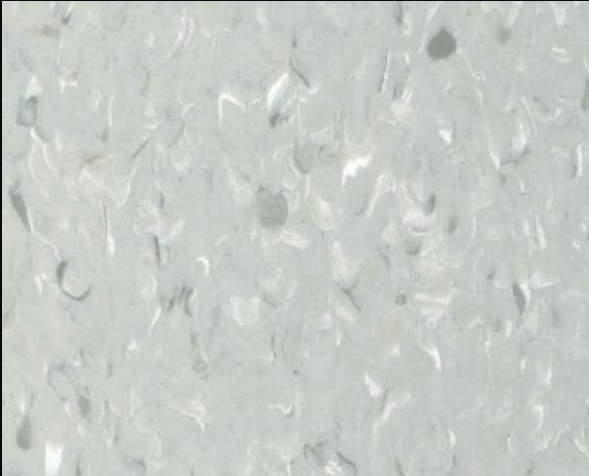

RUNDLE GREY

LRV 41.48




VERMONT WHITE

LRV 63.70



LENNOX BEIGE

LRV 53.26

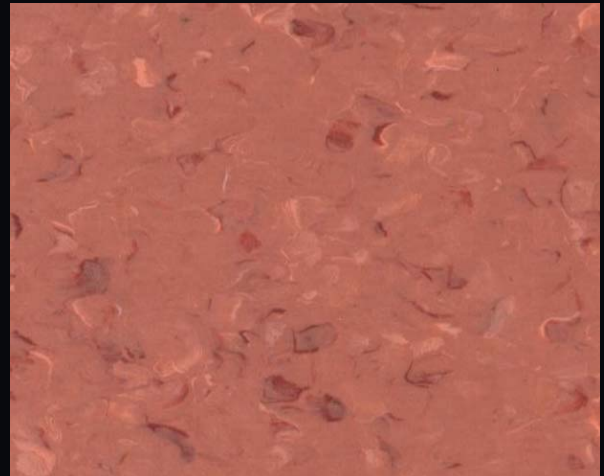

GUNBARREL RED

LRV 21.50



LIVERPOOL YELLOW

LRV 64.80



LRV = Light Reflectance Value

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Samples are for display purposes. Gauge may vary from actual material.

# QUANTUM


(2.00m x 1.83m x 16m sheet)



P4


R10

SLIP RESISTANCE

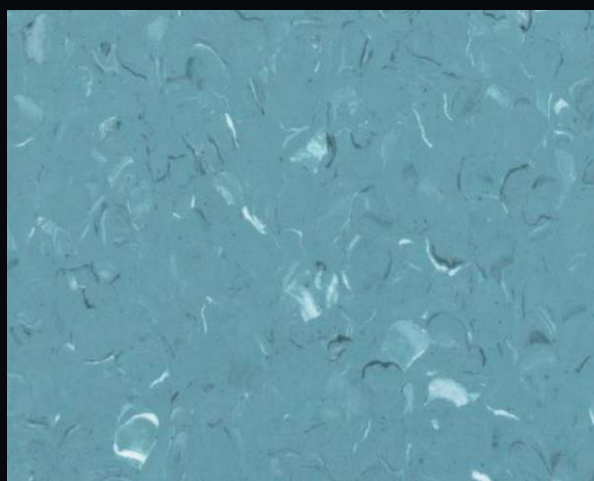

BURWOOD GREEN

LRV 29.56

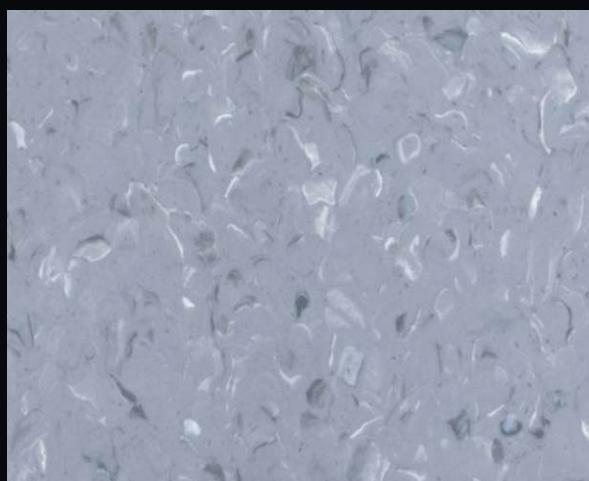

OXFORD GREY

LRV 35.80

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Samples are for display purposes. Gauge may vary from actual material.

# QUANTUM

## COMMERCIAL FLOORING – HOMOGENEOUS VINYL SHEET



Australian made QUANTUM is a homogeneous sheet vinyl floor with a contemporary colour palette and unique visual, combining excellent durability and maintenance characteristics. Quantum is especially suitable for facilities subject to high daily use.

### PRACTICAL

- Low maintenance, protective polyurethane reduces initial and ongoing maintenance and increases scuff resistance.
- No need to apply polish.
- Flexible for ease of installation.

### DURABLE



- Homogeneous construction for excellent dent and gouge resistance.
- Embossed surface texture and multi-colour chip visual assist maintenance and help hide soiling and wear patterns.


### APPLICATIONS

General traffic areas of:

- Retail
- Office
- Education
- Light industrial
- Health care
- Hospitality

### TECHNICAL DATA


Type of floor covering	ISO 10581	Homogeneous Sheet Vinyl
Manufactured		Australia
Binder Content	ISO 10581	Type 1
Wear Resistance	EN660-2	Group P
Polyurethane Reinforced		Yes PUR
Overall Thickness	ISO 24346	2.0mm
Roll Width	ISO 24341	1.83m
Roll Length	ISO 24341	16m
Light Reflectance Value	AS 1428.1-2009 Appendix B	Refer individual samples
Slip Resistance	AS 4586 Wet Pendulum Oil Wet	P4* R10* *Third party tested. For detail refer to individual Test Reports
Fire Resistance (Floors)	AS/ISO 9239-1 Critical Radiant Flux Smoke Development Rate	≥ 4.57kW/m <sup>2</sup> <750%
Fire Resistance (Walls)	AS/NZS 3837 Cone Calorimeter Average specific extinction area	Group 3 <250m <sup>2</sup> /kg
Classification (Use Area)	EN ISO 10874	Commercial: 34  Industrial: 43 



Visit [www.armstrongflooring.com.au](http://www.armstrongflooring.com.au) or contact Customer Service 1800 632 624 for technical data, installation, cleaning and maintenance instructions.

Please note: Recommendations are for guidance only, refer to relevant local, state, and federal construction codes and standards for requirements.

**Contact:**



**Armstrong Flooring Pty Ltd**  
29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:  
Australia Freecall 1800 632 624  
Email [customer\\_services@armstrongflooring.com](mailto:customer_services@armstrongflooring.com) or contact us on the web

[www.armstrongflooring.com.au](http://www.armstrongflooring.com.au)

M3066 April 2017