

FITNICE® FLOOR

Woven Textile Vinyl

RECOMMENDED MAINTENANCE PROCEDURES

Initial Care:

After installation is completed:

1. Remove all debris (Vacuum).
2. Damp mop using Armstrong Flooring **Once 'n' Done*** (*or similar pH neutral cleaner).


Allow 48 hours before carrying out the following:

1. Vacuum to remove dust and debris
2. For large unobstructed areas: Wet scrub using automatic scrubbing machine such as Rotowash (use medium/soft nylon bristle brush) and Armstrong Flooring **Once 'n' Done***. Rinse clean.
3. For small areas: Wet scrub using soft bristled broom and Armstrong Flooring **Once 'n' Done***. Rinse with clean water.

NOTE: Dilute chemicals to appropriate levels for each application as per instructions on container.


Routine care:

Daily: Sweep, vacuum, static mop. Regularly damp mop and wet scrub; use Armstrong Flooring **Once 'n' Done***. Frequency and type of maintenance required depends on traffic flow, application, environmental conditions and customer requirements. **Light** and **accent colours** can require more maintenance. where practical choose darker, more camouflaging colours.

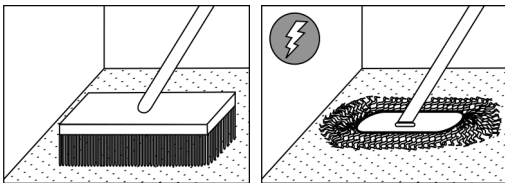

Daily:

- Sweep or vacuum thoroughly to remove all dirt and dust.
- A mechanical scrubber/sweeper such as Rotowash is ideal for the maintenance of Fitnice.

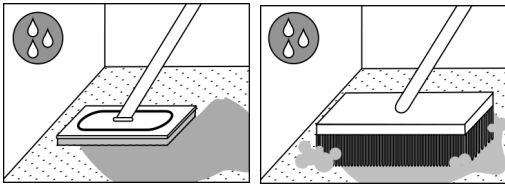


Periodic / Regular — manual:

- Damp Mop (Nylon/Rayon/Microfibre)

Regular: Small areas.

- Wet scrub using a soft bristled broom & **Once 'n' Done***.
- Rinse with clean water.

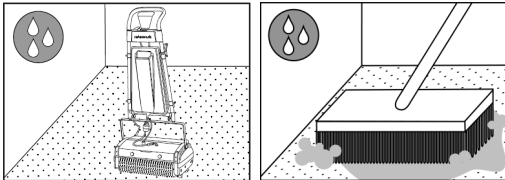

Periodic / Regular—machine: Large & unobstructed areas.

- Wet Scrub using automatic scrubbing machine, such as Rotowash (use medium/soft nylon bristle brush) ≤600RPM with **Once 'n' Done**. If necessary rinse with clean water
- Wet scrub around edges & fixtures using soft bristled broom & **Once 'n' Done***, rinse with clean water.

Protection:

Use walk-off mats that are as wide as the doorway entrances and long enough (min 3 average paces) to trap dirt before reaching the resilient floor. Ensure that walk-off mats are cleaned frequently.

Sand and grit are abrasive and can damage floors; stopping dirt at the entrance means less dirt trafficked through the building, protecting your investment and helping keep maintenance costs down.

Ensure all furniture legs have well maintained non-abrasive feet, exposed metal legs can damage flooring.

Rubber products such as tyres and mats can stain flooring, do not leave these items sitting on the floor.

Stain Removal:

Treatment should be carried out when stains are fresh, immediately remove contaminant. Spot clean with a neutral floor cleaner using soft nylon brush. After stains have been removed, rinse floor with clean water and allow to dry.

Warnings & General Hints

1. DO NOT USE: Highly acidic, caustic or solvent agents such as hydrochloric/sulfamic acid, toilet bowl cleaner, paint stripper, benzene, toluol, acetone or strong scouring powders, as these will damage the floor.
2. All vinyl flooring should be protected during the construction period. Do not use plastic film, use cardboard or plywood.
3. Adhesive residue may be removed using a clean white cloth dampened with small amounts of mineral turps, carefully following warnings on container, immediately rinse with clean water (test in inconspicuous area first)
4. Auto scrubbing in unobstructed areas takes approximately 20% of the time of damp mopping. For maximum efficiency use damp mopping in obstructed areas only.
5. Spot mopping / spot scrubbing should be used when necessary. **Spillages** – post wet floor signs and wipe up immediately. Allow to dry and remove signs.

For further Armstrong Flooring information:

Freecall 1800 632 624

www.armstrongflooring.com.au