

# PRODUCT SPEC PAGE

## Coved & Sculptured Wall Base Installation Products


### Product Information

Product Line	Construction	Product Specifications	Overall Thickness	Installation
Coved Wall Base	Thermoplastic Rubber	ASTM F1861, Type TP, Group 1, Style B	0.125 in. (3.18 mm)	S-725 Wall Base Adhesive
Sculptured Wall Base		ASTM F1861, Type TP, Group 1, Style A	0.25 in. (6.35 mm)	

### Packaging

Products	Height	Feet per Carton	Pieces per Carton
Coved - Sticks	4.0 in. (101.6 mm)	120 lin. ft. (36.57 m)	30
Coved - Rolls			1
Sculptured	4.5 in. (114.3 mm)	48 lin. ft. (14.63 m)	6

### Product Structures

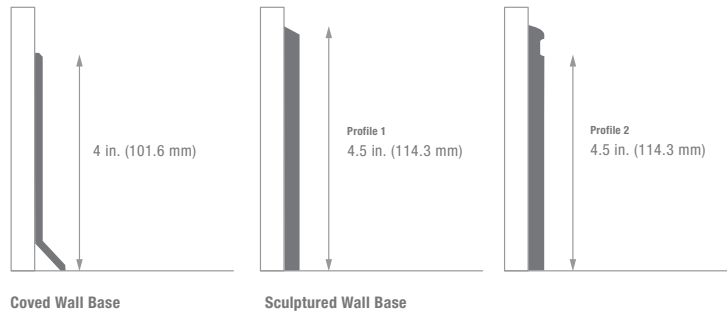

### Testing

	Performance	Test Method	Requirement	Performance vs. Requirement
ASTM F1861	Composition of Materials	Certificate of Compliance	As specified	Meets
	Wear Layer Thickness	ASTM F 410	≥ 0.002 in.	Meets
	Flexibility	ASTM F 137	¼ inch mandrel no cracks or breaks in wear surface	Meets
	Staining of adjacent surfaces induced by wall base	ASTM F1861 Section 12	No staining of adjacent surfaces	Meets
	Resistance to Light	ASTM F 1515	Max. avg. ΔE ≤ 8	Meets
	Resistance to Chemicals	ASTM F 925	No more than slight change in surface dulling, attack or staining	Meets
	Dimensional Stability	ASTM F1861 Section 12	±0.25%	Meets
	Height	ASTM F1861 Section 9	As specified, ±1% of nominal height	Meets
	Thickness	ASTM F386	As specified, 0.080 in. +0.015/ -0.005 in. 0.25 in. + 0.015/ -0.015 in.	Meets
	Length	ASTM F1861 Section 9	As specified, no less than nominal value	Meets
Additional Testing	Fire Resistance	ASTM E84	Class II (26 - 75)	Meets

### Sustainability

Certification Attribute	Standard	3rd party Certification/Certifier
Low-Emitting Material	CDPH v1.2 (2017) a.k.a CHPS 01350	FloorScore®/SCS
Low-Emitting Adhesive (S-725)	CDPH v1.2 (2017) a.k.a CHPS 01350	FloorScore/SCS

# PRODUCT SPEC PAGE

## Coved & Sculptured Wall Base Installation Products

### Sustainability Continued

Performance	Standard	Requirements	Performance vs. Requirements
TVOC Range	CDPH v1.2 (2017) a.k.a CHPS 01350	<0.5 mg/m <sup>3</sup>	Meets
Low Emitting Adhesives (S-725)	SCAQMD Rule #1168	Less than 50 g/L	S-725 Exceeds – 0 g/L
Fundamental Material Safety Toxic Material Reduction	WELL™ Feature 11 and 25	No asbestos, free of lead and phthalates (DEHP, DBP, BBP, DIDP, DNOP)	Meets

### Limited Warranty

5-year Commercial Warranty when installed in strict accordance with the detailed instructions at [ArmstrongFlooring.com](http://ArmstrongFlooring.com).

4 ft. Sticks - R41XX  
Roll Cove - R48XX

R41SL   R48SL salt R53SL   R52SL salt ◆	R41PR   R48PRI parchment R53PR   R52PR parchment ◆	R41CI   R48CI classic ivory R53CI   R52CI classic ivory ◆	R41DS   R48DS desert	R41ES   R48ES essential sand	R41CM   R48CM camel
R41CR   R48CR carbon beige R53CR   R52CR carbon beige ◆	R41PB   R48PB pebble	R41GR   R48GR greige	R41FX   R48FX flax	R41TR   R48TR turmeric	R41SD   R48SD saddle
R41BH   R48BH buffalo hide	R41ML   R48ML molasses R53ML   R52ML molasses ◆	R41WB   R48WB warm black	R41FS   R48FS flagstone	R41EB   R48EB ebony R53EB   R52EB ebony ◆	R41ND   R48ND indigo
R41GM   R48GM gray mist	R41SW   R48SW stonewash	R41MG   R48MG metal gray	R41SG   R48SG smokey gray R53SG   R52SG smokey gray ◆	R41CG   R48CG coastal green	R41AN   R48AN almost navy

[ArmstrongFlooring.com/commercial](http://ArmstrongFlooring.com/commercial) | 1 888 276 7876

◆ Available in Sculptured Wall Base  
Profile 1 - R53XX  
Profile 2 - R52XX

**MADE IN THE USA**  
with global and domestic  
content, for quick availability

FP7440F10440-820  
© 2020 AFI Licensing LLC.  
Armstrong® and the Armstrong Logo are trademarks of AFI Licensing LLC.  
FloorScore® is a registered trademark of the Resilient Floor Covering Institute.  
All other marks are trademarks of Armstrong Flooring, Inc. or its subsidiaries.