

## LUXURY FLOORING

## Exchange™

### Product Information

**Construction** - Solid Vinyl Tile (Luxury Vinyl Tile / LVT)

**Product Lines** - Exchange

**International Specifications** - ASTM F 1700, Class III, Type B embossed surface


**Overall Thickness** - 0.100" (2.5 mm)

**Wear Layer Thickness** - 0.020" (0.5 mm)

**Factory Finish** - Diamond 10® Technology

**Installation** - Adhesives: S-315 Roll Strong™, S-980, S-1000, S-240 Epoxy

**Maintenance Options** - No Polish - No Buff, Polish Optional

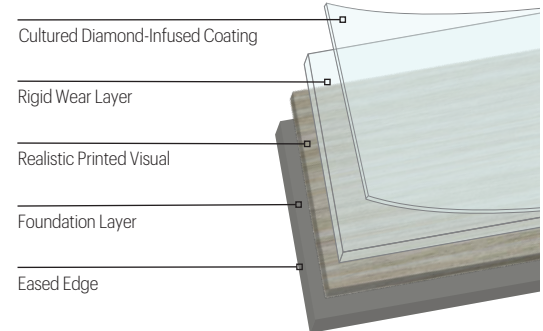

### Packaging

Size	Pieces per Carton/Coverage	Shipping Weight per Carton
6" x 36" (152.4 mm x 914.4 mm)	24 / (36 sq. ft.) 3.35 m <sup>2</sup>	39 lbs. (17.73 kg)

### Testing

Performance	Test Method	Requirement	Performance vs. Requirement
Thickness	ASTM F386	Nominal ±0.005"	Meets
Wear Layer Thickness	ASTM F410	0.020" (0.5 mm) minimum for Commercial Use	Meets
Size	ASTM F2421	± 0.016" per linear foot	Meets
Squareness	ASTM F2421	0.010" maximum	Meets
Residual Indentation	ASTM F1914	Average less than 8%	Meets
Dimensional Stability	Internal	≤ 0.018" per linear ft. MD ≤ 0.012" per lin. ft. AMD	Meets
Chemical Resistance	ASTM F925	No more than slight change in surface dulling, attack or staining	Meets
Resistance to Heat	ASTM F1514	ΔE < 8 avg., max	Meets
Resistance to Light	ASTM F1515	ΔE < 8 avg., max	Meets
Static Load Resistance @ 250	ASTM F970	≤ 0.005"	Meets
<b>Additional Testing</b>			
Static Load Resistance	ASTM F970*	≤ 0.005"	2000 psi
Fire Test Data – Flame Spread	ASTM E648	0.45 W/cm <sup>2</sup> or more Class 1	Meets
Fire Test Data – Smoke Evolution	ASTM E662	450 or less	Meets
Fire Test Data – Canada	CAN/ULC S-102.2	Use dependent	Flame Spread - 5   Smoke Developed - 75
ADA Standards for Accessible Design	Chapter 3, Section 302.1	Floor surfaces shall be stable, firm and slip resistant	Meets
Static Coefficient of Friction**	ASTM D2047/UL 410	≥ 0.5	Meets
Acoustics	ASTM E492 (IIC) ASTM E90 (STC) ASTM E2179 (DELTA IIC)	International Building Code (IIC ≥50) International Building Code (STC ≥50) Sound Transmission Reduction	6" concrete, no ceiling with S-1840 Quiet Comfort Luxury Flooring Underlayment IIC - 53 STC - 51 Delta IIC - 22

### Sustainability

#### WELL v1 Feature

<b>Air</b>	Feature 04 - VOC Reduction
	Feature 11 - Fundamental Material Safety
	Feature 25 - Toxic Material Reduction
<b>Mind</b>	Feature 97 - Material Transparency
	Feature 88 (Part 2) Biophilia I - Qualitative
	Feature 99 - Beauty and Design II

#### Exchange

✓
✓
✓
✓
✓
✓

#### Contribution

Tested and third party certified by FloorScore as complying with CDPH v1.2
Product is free of asbestos and added lead (Part 1)
Free of flame retardants (Part 2) and phthalates (Part 3)
Readily available Health Product Declaration (HPD) to 1000 ppm
Products available that incorporate nature patterns
Patterns and colors to aid in wayfinding and spatial familiarity (Part 3)

#### WELL v2 Feature

<b>Air</b>	Feature X12 - Short Term Emission Control
	Feature X11 Long-Term Emission Control
	Feature X01 Fundamental Material Precautions
	Feature X10 Volatile Organic Compound
<b>Materials</b>	Feature X14 Material Transparency
	Feature M02 Access to Nature
<b>Mind</b>	Feature C13 (Part 2) Accessibility and Universal Design

#### Exchange

✓
✓
✓
✓
✓
✓
✓

#### Contribution

Adhesives associated with product are tested and third party certified by FloorScore as complying with CDPH v1.2
Flooring is tested and third party certified by FloorScore as complying with CDPH v1.2
Product is free of asbestos
Free of flame retardants (Part 2) and phthalates (Part 3)
Readily available Health Product Declaration (HPD) to 1000 ppm
Products available that incorporate nature patterns
Patterns and colors to aid in wayfinding and spatial familiarity

#### LEED™ v4.1

BPDO - EPD
BPDO - Material Ingredient
BPDO - Sourcing
Location of Manufacturer
Low Emitting Flooring
Low Emitting Adhesives
SCAQMD #1168 Compliant
Adhesives meet >50 g/L requirement

#### Exchange

Industry Average
HPD
29% pre-consumer recycled content
USA
Tested and third party certified by FloorScore as complying with CDPH v1.2
Tested and compliant to CDPH v1.2; Methylene Chloride and Perchloroethylene not intentionally added; FloorScore Certified
S-240 Epoxy – 10 g/L
S-315 Roll Strong – 0 g/L
S-980 – 14 g/L
S-1000 – 0.1 g/L

### Limited Warranty

20-year Commercial Warranty when installed in strict accordance with the detailed instructions.

### Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation & Maintenance recommendations.

#### F-10532E-221

Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | All other trademarks are owned by AFI Licensing LLC. | © 2021 AFI Licensing LLC. FloorScore® is a registered trademark of the Resilient Floor Covering Institute. | LEED® is a registered trademark of the United States Green Building Council

\*Testing at loads above 250 psi is outside the scope of the test method. Since testing is conducted on uninstalled flooring, results do not consider the performance of the adhesive, underlayment, or subfloor. These test results are not an indicator of the installed flooring system performance. \*\*Using the James Machine as described in D2047 and as directed in UL 410 for floor covering materials (FCM) using a leather foot under dry conditions. The application of site-applied floor sealers, polishes and other types of finishes routinely used to maintain resilient flooring materials will change the walking surface and consequently the SCOF value.

